
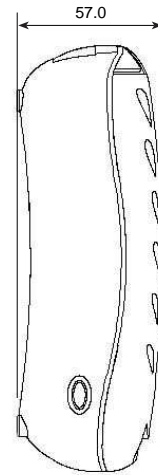


# GP Batteries

## Product Specification

Model No.: GPPB19

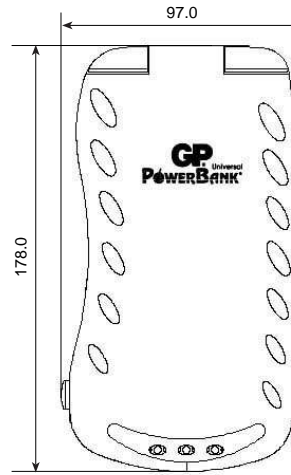

Unit : mm

- Product Name : GP PowerBank Universal
- Description : Universal battery charger with external adaptor
- Input Voltage : 230V AC 50Hz (GS), 240V AC 50Hz (BS), 120V AC 60Hz (UL)
- Output Voltage : D/C/AA/AAA 2 x 2.8V DC  
9V 2 x 9V DC
- Application : For charging 2 or 4 pcs AA, AAA, C or D size battery (2 batteries per one channel), and 1 to 2 pcs 9V size

Rated Charging Current :

	D	C	AA	AAA	9V
	560mA	440mA	260mA	120mA	14mA

Charging Time :

Size	Battery Capacity	Charging Time(hours)	Size	Battery Capacity	Charging Time(hours)
AA	1300 mAh	~ 5	D	2200 mAh	~ 5
	1600 mAh	~ 8		4500 mAh	~ 10
	1800 mAh	~ 9		7000 mAh	~ 16
	2000 series	~ 9.5		9000 mAh	~ 21
	2100 series	~ 10			
	2200 series	~ 10.5			
AAA	2300 series	~ 11	C	2200 mAh	~ 5
	600 mAh	~ 5		3500 mAh	~ 10
	650 mAh	~ 7		4000 mAh	~ 12
	700 mAh	~ 7.5			
	800 mAh	~ 8.5	9V	170 mAh	~ 16
	850 mAh	~ 9			

- MTBF : 30000 hours
- Operating Temperature : 0°C to 45°C
- Storage Temperature : -20°C to 60°C
- Charge Indicator : 2 Green LED for 2 channels; 1 Green LED for 9V
- Dimensions : 178 (L) X 97 (W) X 57 (T)mm
- Approval : Charger - CE, FCC  
Adaptor - CE, GS, BS, UL, CSA